

SEE THE CLARITY.



THERMAL IMAGERS

eclipse® LDX

The Best Image Quality. Ever.

Enhanced with the newest state-of-the-art infrared engine technology, the Eclipse® LDX offers the fire service the highest image quality and performance on the market.

OUTSTANDING Performance

The Eclipse LDX uses infrared engine technology running at an ultra-fast 60 Hertz image update rate and incorporates Image Contrast Enhancement (ICE™) technology for the ultimate image performance in fire conditions. Housed in a compact, sleek design, the Eclipse LDX is available in 240 X 180 and 320 x 240 resolutions to accommodate your budget.

BRIGHTEST LCD Display

The Eclipse LDX display greatly increases brightness and improves contrast, enabling firefighters to see more clearly in thick smoke and direct sunlight.

ADVANCED Features

Now standard on the Eclipse LDX is Super Red Hot colorization, highlighting high-heat scenes in brilliant shades of yellow, orange, and red and temperature measurement in numeric and relative heat indicator formats. Bullard's exclusive Electronic Thermal Throttle®, which enables firefighters to optimize scenes with the touch of a button, is optional.

BEST Ergonomics

The Eclipse LDX is distinguishable from other thermal imagers with its uniquely focused compact ergonomic design specifically for the fire service and a cool, blue metallic swirl color. Multiple colors are also available. Additionally, the imager's power button design enables easy powering on and off with a gloved hand.

FIVE YEAR Warranty

All X Factor Thermal Imagers come standard with a five-year, industry leading, full service warranty on parts and labor. Upgrade to the CareFree® warranty to get five years of coverage on batteries.

ICE™ Image Processing


Equipped with ICE, the Eclipse LDX provides superior infrared imagery utilizing state-of-the-art image processing techniques. ICE technology sharpens the distinction between objects and backgrounds and optimizes the image for greater clarity. With ICE, firefighters can detect beyond the fire.



X Factor Technology featuring Super Red Hot



Past

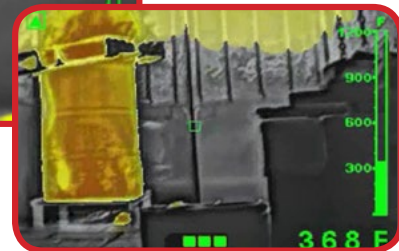

Present



Electronic Thermal Throttle® (optional)

Bullard
TOUGH

www.bullard.com

 **Bullard®**



Technical Specifications

Physical

- Configuration Small Handheld Thermal Imager
- Weight (w/ battery) 1.9 lbs. (DVR does not significantly increase weight)
- Weight (w/o battery) 1.65 lbs.
- Dimensions Height: 5.2", Length: 7.7", Width: 4.3"
- Housing Material Ultem® Thermoplastic
- Housing Colors Metallic Blue, Blue, Yellow, Lime-Yellow, Red, Orange, White, Black

Electrical

- Power Source NiMH Rechargeable Battery
- Battery Capacity 1650 mAh
- Battery Cycles > 800 @ 70% Capacity
- Start-up Time < 4 Seconds
- Operating Time 2 Hours*
- Recharge Time 2 Hours

Infrared Detector

- Detector Type Microbolometer
- Detector Sensing Material Vanadium Oxide
- Detector Resolution 240 x 180 or 320 x 240
- Spectral Response 7-14 Microns
- Update Rate 60 Hz
- NETD < 50 mK
- Dynamic Range 1100° F
- Pixel Pitch 17 μm
- Video Polarity White-Hot

Lens

- Material Germanium
- Field of View 31° V x 40° H
- Focus 1 meter to infinity
- Speed f/1.3

Display

- Type Digital, Liquid Crystal Display (LCD)
- Size 3.5" Diagonal TFT Active Matrix
- Pixel Format RGB
- Brightness 500 cd/m² (minimum)
- Contrast Ratio 350:1 (typical)
- Viewing Angle (Typical) Top = 60°, Bottom = 40°, Left / Right = 60°

Standard Features and Accessories

- Temperature Measurement Numeric and Bar Style
- Super Red Hot Color above 500°F

Optional Features and Accessories

- Electronic Thermal Throttle Manually activated Blue Hot Spot Colorization
- SceneCatcher Digital Video Recorder
 - Video Format NTSC
 - Video File Type AVI
 - Video Image Size 720 x 480
 - Video Record Time 5 hours
 - Connection USB

Performance

- 500° F Heat Resistance 5 minutes with no damage to electronics
- 300° F Heat Resistance 15 minutes of continued operation with no damage
- -20° F Cold Resistance Continued operation
- Water Resistance IP67
- Impact Resistance 6 foot drops on concrete with no damage

* Without DVR operating

Accessories



Eclipse Retractable Strap



Eclipse Battery Charger Base



Eclipse PowerUp



Eclipse Powerhouse Charger



Americas:
Bullard
 1898 Safety Way
 Cynthia, KY 41031-9303 • USA
 Toll-free within USA: 877-BULLARD (285-5273)
 Tel: +1-859-234-6616
 Fax: +1-859-234-8987

Europe:
Bullard GmbH
 Lilienthalstrasse 12
 53424 Remagen • Germany
 Tel: +49-2642 999980
 Fax: +49-2642 9999829

Asia-Pacific:
Bullard Asia Pacific Pte. Ltd.
 LHK Building
 701, Sims Drive, #04-03
 Singapore 387383
 Tel: +65-6745-0556
 Fax: +65-6745-5176

www.bullard.com

©2015 Bullard. All rights reserved.
 Eclipse and Electronic Thermal Throttle are registered trademarks of Bullard.
 Image Contrast Enhancement (ICE™) is a trademark of DRS Technologies.
 Ultem is a registered trademark of General Electric.
 8543 (1215)